



LD 500/510 – Leak detector with camera – shows leakage rate in l/min and cost in €

**NEW:**

Multi-user capable through cloud solution

**NEW:**

Unique laser distance measurement for automatic cost determination



Find out your leakage rate (l/min or cfm) and potential savings (€/year). Currency can be set as required



Find the smallest leaks at large distances

**NEW:**


Automatic sensor detection



Auto level: Automatically adapts the sensitivity to the environment and reliably eliminates ambient noise



Photograph leaking parts



Paperless documentation. Enter everything into the device on site: Define the leakage location as well as the remedial measures and spare parts required



Transmit the leakage data via USB to your desktop software



Create a report in accordance with ISO 50001



9 hours of continuous operation possible



Fatigue-free work – ergonomic, one-hand operation – low weight

FINDING LEAKS PAYS OFF:

Sample calculation for a medium-sized company:

Approx. 25% of compressed air is lost due to leaks
Installed compressor capacity 150 kW(el) x 6000 OpHrs x € 0.12/kWh
Annual electricity costs: **€ 180,000**

25% leakage cost: **27,000 €** per year!



Use the reporting software to quickly and efficiently produce an ISO 50001 report



CS Leak Reporter – cloud solution

Ideal for leak detection service providers and for companies/major corporations with multiple locations.

- Each “user” in the leakage search team can be assigned a role (e.g. leakage search, leakage repair, monitoring, checking for success)
- Access rights to individual or all projects can be assigned individually to each user
- The browser-based software ensures a common database in real time and paperless documentation



CS Leak Reporter – PC solution

Creates detailed ISO 50001 reports. Provides an illustrated overview of the leaks found and their savings potential. Measures for elimination, including status display, can be defined for every leak – license for two computers


Leakage Report	Start: 15/04/2019	End: 25/04/2019	Duration: 10 day(s)
Contact details:	Customer:	Auditor:	
Company: Acme		John Sample	
Address: ...		1 Sample St., 12345 Sampletown	
E-mail: johnacme@sample.com		j.sample@acme.com	
Phone: ...		+49 1234 567890	
Logo:			
Project master data:			
Import date:		CO ₂ emissions:	0.527 kg/kWh
Cost calculation basis: Energy costs (70%)		Specific output:	0.12 kWh/m ³
Compressed air costs: 21.6 €/1000 m ³		Electricity price:	0.18 €/kWh
Operating hours per year: 4350 h			
Results:		Improvements:	
Number of leaks: 141		Number remedied: 1	
Total leakage amount: 718.126 ltr/min		Leakage amount saved: 3.468 ltr/min	
Total costs per year: 4,048.49 €		Costs saved per year: 19.55 €	
Total CO ₂ per year: 11.91 tonnes		CO ₂ saved per year: 0.06 tonnes	

	Leak tag: 1	Building – location: COMPRESSOR ROOM 1	Repair under pressure possible? - No
	Date and time: 15/04/2019 12:06:03	Error: Ball valve defective	
	Leakage rate: < 1.395 ltr/min	Spare part: 1/2" ball valve	
	Costs per year: < 7.86 €	Action: Replace	
	Total CO ₂ per year: 0.02 tonnes	Note: -	
	Priority: Low	Status: Open	
	Comment: Replace ball valve	Remedied on: -	
		Remedied by: -	
	Leak tag: 2	Building – location	Repair under pressure possible? - No
	Date and time: 15/04/2019 12:08:19	Error: Flange leaking	
	Leakage rate: 2.519 ltr/min	Spare part: DN 100 flange seal	
	Costs per year: 14.2 €	Action: Reestablish seal	
	Total CO ₂ per year: 0.04 tonnes	Note: -	
	Priority: High	Status: Done	
	Comment: Reestablish flange seal	Remedied on: 16/04/2019	
		Remedied by: AM	

Sensors:

Acoustic trumpet

Focuses the sound waves of small leaks, thereby amplifying the audible noise. The laser enables precise detection. Integrated laser distance measurement

Accessories:

Headset

The noise-proof headset enables leak detection even in an extremely loud environment. The ambient noise is faded out, and the leakage (inaudible ultrasonic sound) is transformed into an audible signal


Parabolic mirror

For leak detection at great distances. Laser pointer and camera integrated


Holster with shoulder strap

For the LD 500/510, enables ergonomic and safe work


Focus tube with focus tip

For pinpoint detection of the smallest leaks in confined spaces


Leak tags


As hardcopies for documentation on site


Gooseneck

Enables pinpoint detection of the leak in places that are difficult to access. Background noise is faded out


Ultrasonic tone generator


A handy ultrasonic tone generator is available for detecting leaks in systems that are not under pressure. The transmitter is positioned so that the sound can enter the pipe system. The ultrasonic signal penetrates the smallest openings, which can then be detected with the LD 500

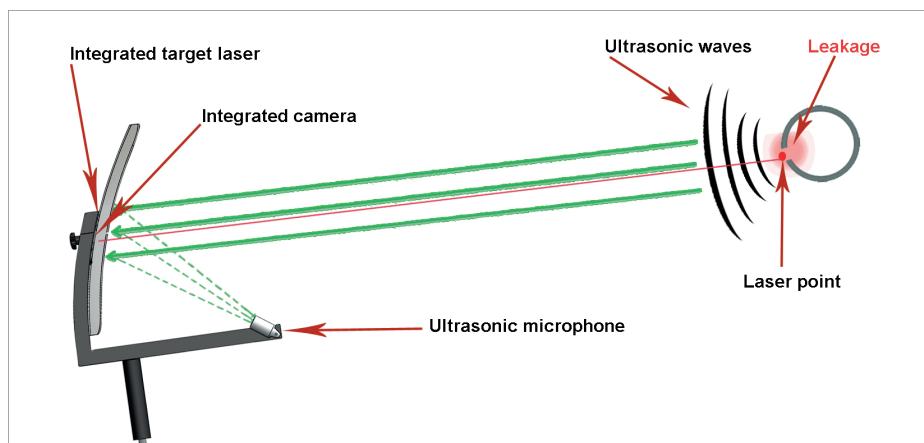Professional accessory – parabolic mirror


By focusing the ultrasonic waves in the parabolic mirror, even the smallest leaks of 0.8 l/min (approx. € 8 p.a.) can be located with pinpoint precision (± 15 cm) at a distance of up to 10 to 15 m.

The shape of the parabolic mirror ensures that only ultrasonic waves of the targeted leak are evaluated. Background noise is reduced to a minimum.

Easy documentation in the device directly on site

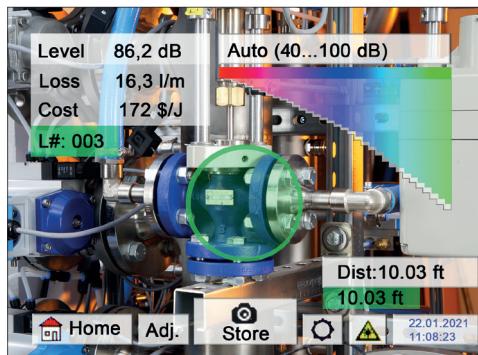

Detect a leak

The device indicates the leakage rate in (l/min or cfm) and the savings potential in (€ /year) on the display. Currency can be set as required. This data is saved together with the photo.

Meas. Point	
Company	CS INSTRUMENTS
Building	South office
Place	Compressor room
LeakTag	1
OK	

Define the location

The location of each leak can be stored:
Company / building / location

Fault Description	
Leak.Element	Pressure regulator
Measures	Change seal
Replacement	Pressure Regulator
Repair under pressure possible?	<input type="checkbox"/>
Comment	Empty the lines first
OK	

Remedy the leak

Efficiency and clarity also for elimination of leaks. Definition of the necessary spare parts and maintenance work already on site.

Nr.	Replacement
001	3/2 way pneumatic valve
002	mini regulator 1/4"
003	quick coupling NW 7,2
004	y plug connection 6mm
new	delete
Cancel	OK

Spare parts list in the device

The software can be used to transfer a custom spare parts list to the device. The device offers an intelligent search function with auto-complete feature.

The list with the required spare parts can be exported from the CS Leak Reporter software.



The LD 500/510 in detail

The new leakage meters LD 500/LD 510 with integrated camera and leakage calculation are ideal measuring devices which help to easily find and document even the smallest leaks (0.1 l/min corresponds to approx. € 1 per year) even at great distances.

LD 510 is the world's first leakage meter with an additional freely assignable sensor input for all CS sensors. In addition to leakage measurement and detection, all necessary measurements relating to dew point, flow, pressure, temperature, ... can also be carried out.



Costs per year						
Pressure	Size of leak – diameter (mm)					
	0.5 mm	1.0 mm	1.5 mm	2.0 mm	2.5 mm	3.0 mm
3 bar	€ 90	€ 361	€ 812	€ 1,444	€ 2,256	€ 3,248
4 bar	€ 113	€ 451	€ 1,015	€ 1,805	€ 2,820	€ 4,061
5 bar	€ 135	€ 541	€ 1,218	€ 2,166	€ 3,384	€ 4,873
6 bar	€ 158	€ 632	€ 1,421	€ 2,527	€ 3,948	€ 5,685
7 bar	€ 180	€ 722	€ 1,624	€ 2,888	€ 4,512	€ 6,497
8 bar	€ 203	€ 812	€ 1,827	€ 3,248	€ 5,076	€ 7,309

Table: Leakage costs in one year with 24-hour operation 365 days per year calculated with compressed air costs of 1.9 ct/Nm³.



Transport case – LD 500/510



Transport case – Parabolic mirror

TECHNICAL DATA OF THE LD 500 / LD 510

Operating frequency:	40 kHz ± 2 kHz
Connections:	3.5 mm stereo jack for headset, power supply socket for connecting an external charger
Laser:	Wavelength: 630...660 nm Output power: < 1 mW (laser class 2)
Display:	3.5" touch screen
Interface:	USB interface
Data logger:	16 GB SD memory card (100 million values)
Power supply:	Internal rechargeable Li-Ion batteries, approx. 9 h continuous operation, 4 h charging time
Ambient temperature:	0...+50 °C
EMC:	DIN EN 61326
Auto level:	Automatically adapts the sensitivity to the environment and reliably eliminates ambient noise
Sensitivity:	min: 0.1 l/min at 6 bar, 5 m distance, approx. € 1/year of compressed air costs
Weight without headset:	540 grams

TECHNICAL DATA OF EXTERNAL SENSOR INPUT (LD 510 ONLY)

Measuring range:	See external CS sensors
Accuracy:	See external CS sensors
Power supply:	Output voltage: 24 VDC ± 10% Output current: 120 mA in continuous operation



DESCRIPTION	ORDER NO.
LD 500 set consisting of:	
LD 500 leak detector with acoustic trumpet and integrated camera, 100 leak tags for marking the leaks on site	0560 0105
NEW: Integrated laser distance measurement	Z554 5000
Transport case	0554 0106
Sound-proof headset	0554 0104
Focus tube with focus tip	0530 0104
AC adapter plug	0554 0009
Spiral cable for connecting the ultrasonic sensor, length 2m (extended)	020001402
Holster with shoulder strap for LD 500/510	020001795



DESCRIPTION	ORDER NO.
LD 510 set consisting of:	
LD 510 leak detector incl. acoustic trumpet, with integrated camera and additional input for external sensors, 100 leak tags for marking the leaks on site	0560 0106
NEW: Integrated laser distance measurement	Z554 5000
Transport case	0554 0106
Sound-proof headset	0554 0104
Focus tube with focus tip	0530 0104
AC adapter plug	0554 0009
Spiral cable for connecting the ultrasonic sensor, length 2m (extended)	020001402
Holster with shoulder strap for LD 500/510	020001795

Accessories



DESCRIPTION	ORDER NO.
Gooseneck for leak detection at sites which are difficult to access (length 600 mm)	0530 0105
Gooseneck for leak detection at sites which are difficult to access (length 1500 mm)	0530 0108



DESCRIPTION	ORDER NO.
Parabolic mirror for leak detection at long distances, incl. transport case	0530 0106



DESCRIPTION	ORDER NO.
Ultrasonic tone generator for leak testing	0554 0103



DESCRIPTION	ORDER NO.
500 leak tags for marking the leaks on site	0530 0107

Software



DESCRIPTION	ORDER NO.
CS Leak Reporter V2 Creates detailed ISO 50001 reports. Provides an illustrated overview of the leaks found and their savings potential. Measures for elimination, including status display, can be defined for every leak – license for two computers New functions: - Simple spare parts management - Histogram functions for documenting continuous improvement in accordance with ISO 50001 on the company or building level	0554 0205



DESCRIPTION	ORDER NO.
CS Leak Reporter V2 – additional licence for one computer	Z554 0205CS



DESCRIPTION	ORDER NO.
CS Leak Reporter – cloud solution Basic package: Browser-based access to the CS Cloud. Advantages: - Common database of all users in real time. - Cross-location work in a team - Paperless documentation. - Unlimited number of guest logins (read-only rights) can be set up. Only available in combination with at least one CS Cloud (0554 0306) user licence.	0554 0305




DESCRIPTION	ORDER NO.
User licence – CS Cloud 1 user / 12 months for CS Leak Reporter Cloud solution use.	0554 0306

LD 500/510 calibration



DESCRIPTION	ORDER NO.
LD 500/LD 510 re-calibration	0560 3333

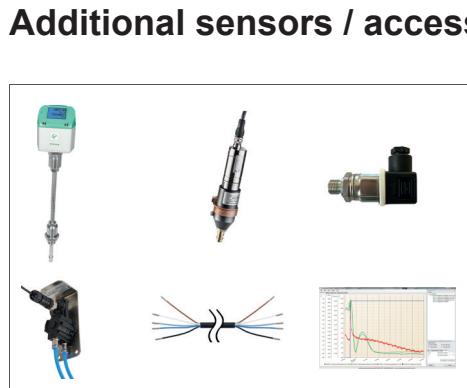

DESCRIPTION	ORDER NO.
FA 510 dew point sensor for mobile devices, -80...+20 °Ctd incl. mobile measuring chamber, 5 m connection cable and perforated protection cap	0699 1510
VA 500 flow probe, max. version (185 m/s), probe length 220 mm, incl. 5 m connection cable	0695 1124
Standard pressure probe CS 16, 0...16 bar, $\pm 1\%$ accuracy of f.s.	0694 1886
Differential pressure probe 1.6 bar diff.	0694 3561
Connection cable for pressure, temperature or external sensors on mobile instruments, 5 m	0553 0501
CS Basic – data evaluation in graphic and table form – readout of the measured data via USB or Ethernet. License for two workstations	0554 8040